



# 1 TO ASSEMBLE

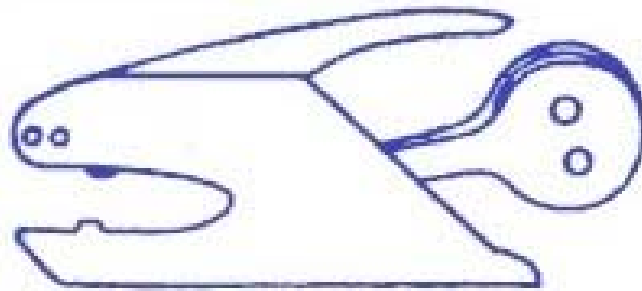


\*Remove discs from storage position in plier body.

2

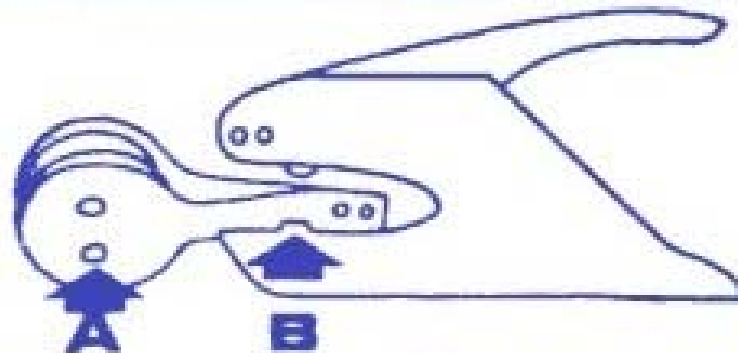

\*Holding discs firmly pinched together, insert spring end into plier body with locating holes on discs (A) downwards to engage upright lugs (B) of plier

3

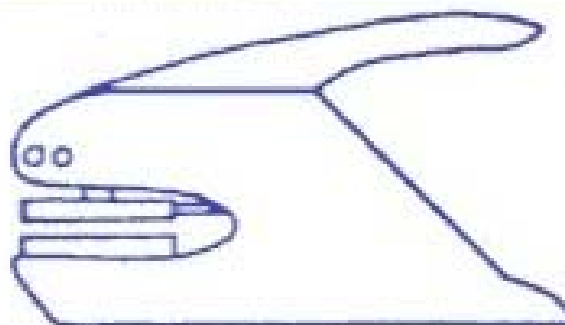

\*Release pressure on the discs when fully inserted into body, ensuring that body lugs have correctly located on lower disc holes. Seal is now ready for use.

\*To dismantle, simply reverse procedure.